CSE 6242 / CX 4242 Data and Visual Analytics | Georgia Tech

Spark & Spark SQL

High-Speed In-Memory Analytics over Hadoop and Hive Data

Instructor: Duen Horng (Polo) Chau

Slides adopted from Matei Zaharia (MIT) and Oliver Vagner (TGI Fridays)

What is Spark?

http://spark.apache.org

Not a modified version of Hadoop

Separate, fast, MapReduce-like engine

» **In-memory** data storage for very fast iterative queries

» General execution graphs and powerful optimizations

» Up to 40x faster than Hadoop

Compatible with Hadoop's storage APIs

» Can read/write to any Hadoop-supported system, including HDFS, HBase, SequenceFiles, etc

What is Spark SQL?

(Formally called Shark)

Port of Apache Hive to run on Spark

Compatible with existing Hive data, metastores, and queries (HiveQL, UDFs, etc)

Similar speedups of up to 40x

Project History [latest: v1.1]

Spark project started in 2009 at UC Berkeley AMP lab, open sourced 2010

Became Apache Top-Level Project in Feb 2014

Shark/Spark SQL started summer 2011

Built by 250+ developers and people from 50 companies

Scale to 1000+ nodes in production

In use at Berkeley, Princeton, Klout, Foursquare, Conviva, Quantifind, Yahoo! Research, …

http://en.wikipedia.org/wiki/Apache_Spark

Why a New Programming Model?

MapReduce greatly simplified big data analysis

But as soon as it got popular, users wanted more:

- » More **complex**, multi-stage applications (e.g. iterative graph algorithms and machine learning)
- » More **interactive** ad-hoc queries

Why a New Programming Model?

MapReduce greatly simplified big data analysis

But as soon as it got popular, users wanted more:

- » More **complex**, multi-stage applications (e.g. iterative graph algorithms and machine learning)
- » More **interactive** ad-hoc queries

Require faster **data sharing** across parallel jobs

Up for debate… as of 10/7/2014

Is MapReduce dead?

Google Dumps MapReduce in Favor of New Hyper-Scale Analytics System

http://www.datacenterknowledge.com/archives/2014/06/25/google-dumps-mapreduce-favor-new-hyper-scale-analytics-system/

http://www.reddit.com/r/compsci/comments/296aqr/on_the_death_of_mapreduce_at_google/

reddit COMPSCI comments related other discussions (3)

On the Death of Map-Reduce at Google. (the-paper-trail.org)

87 submitted 3 months ago by qkdhfjdjdhd

20 comments share

all 20 comments

sorted by: best

[-] tazzy531 47 points 3 months ago

As an employee, I was surprised by this headline, considering I just ran some mapreduces this past week.

After digging further, this headline and article is rather inaccurate.

Cloud DataFlow is the external name for what is internally called Flume.

Data Sharing in MapReduce

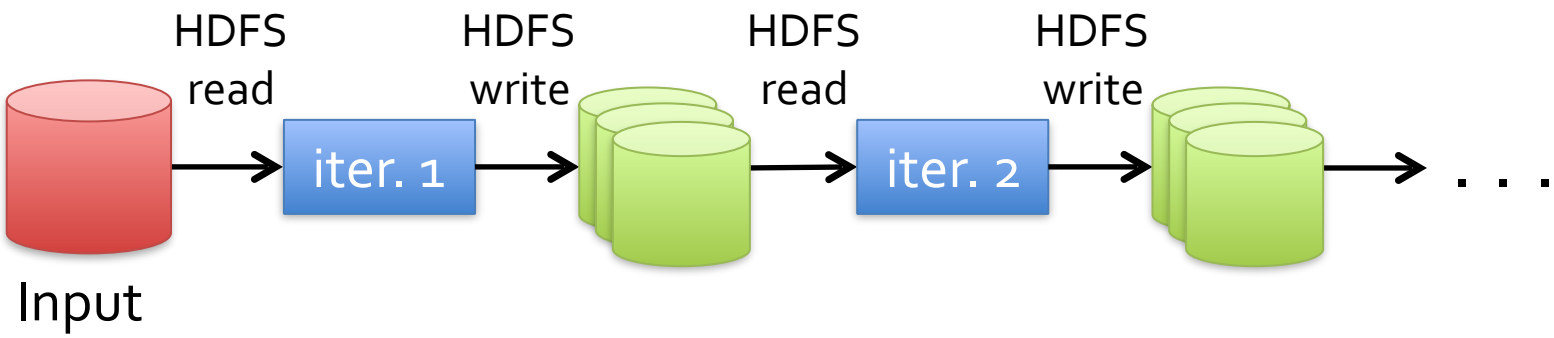

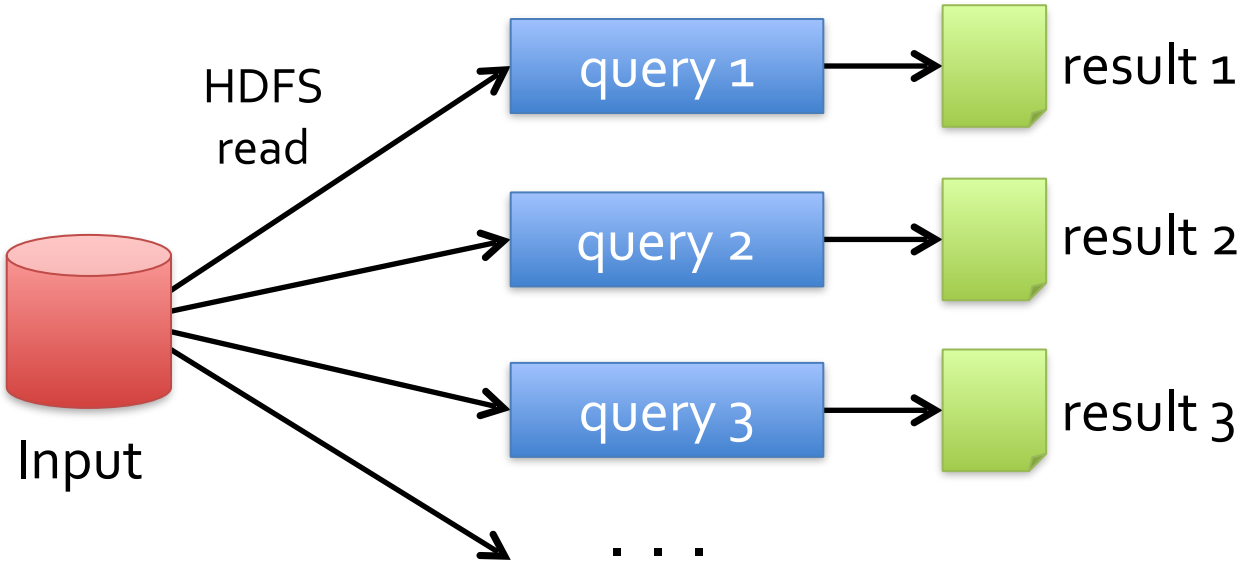

Data Sharing in MapReduce

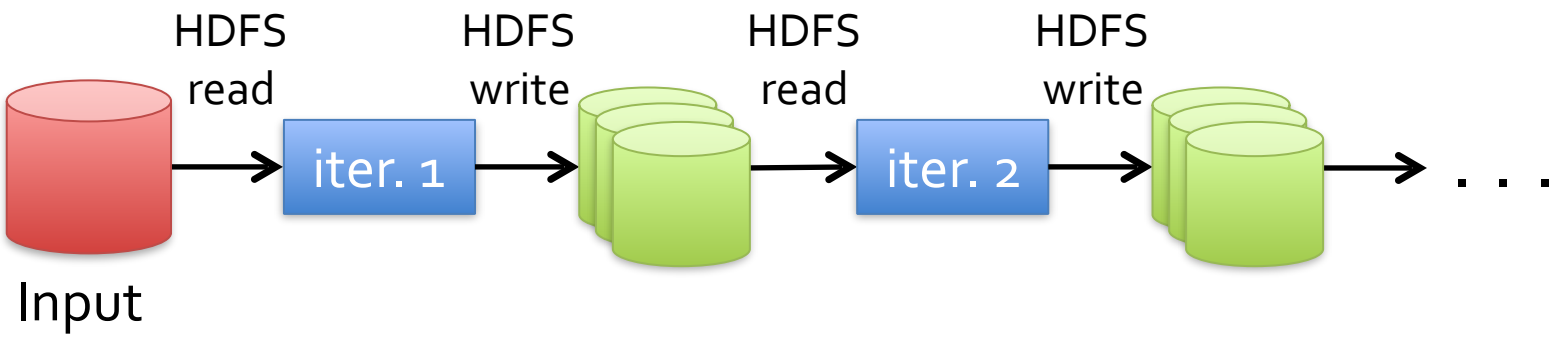

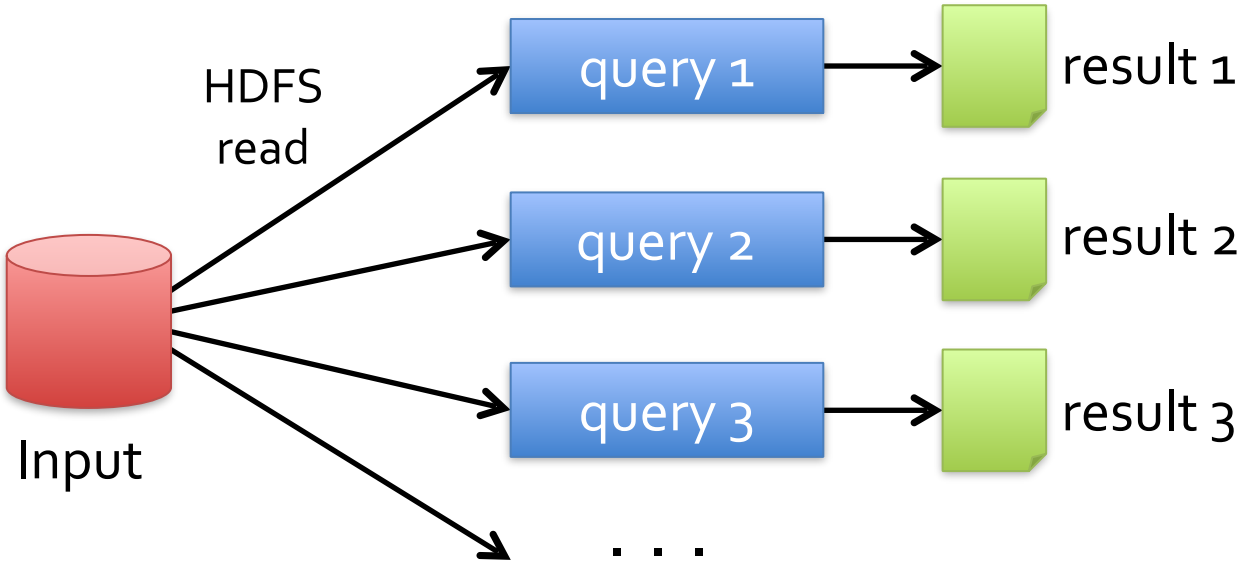

Slow due to replication, serialization, and disk IO

Data Sharing in Spark

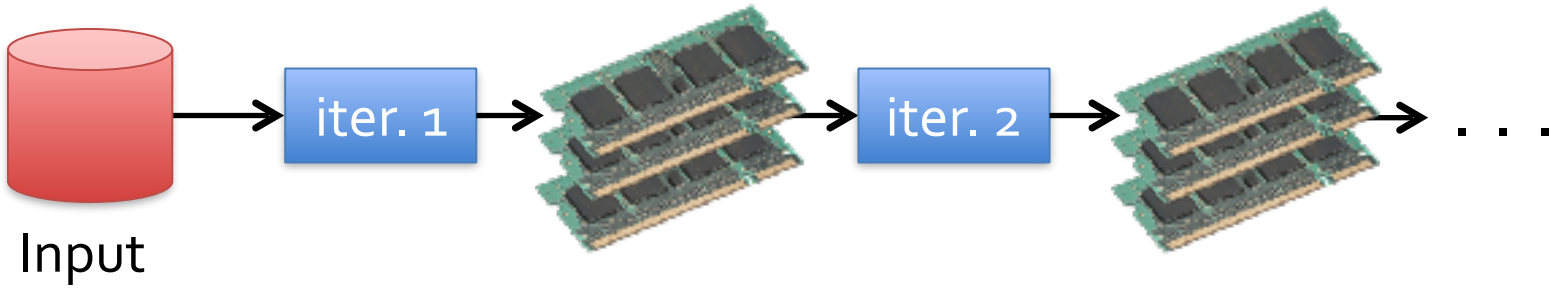

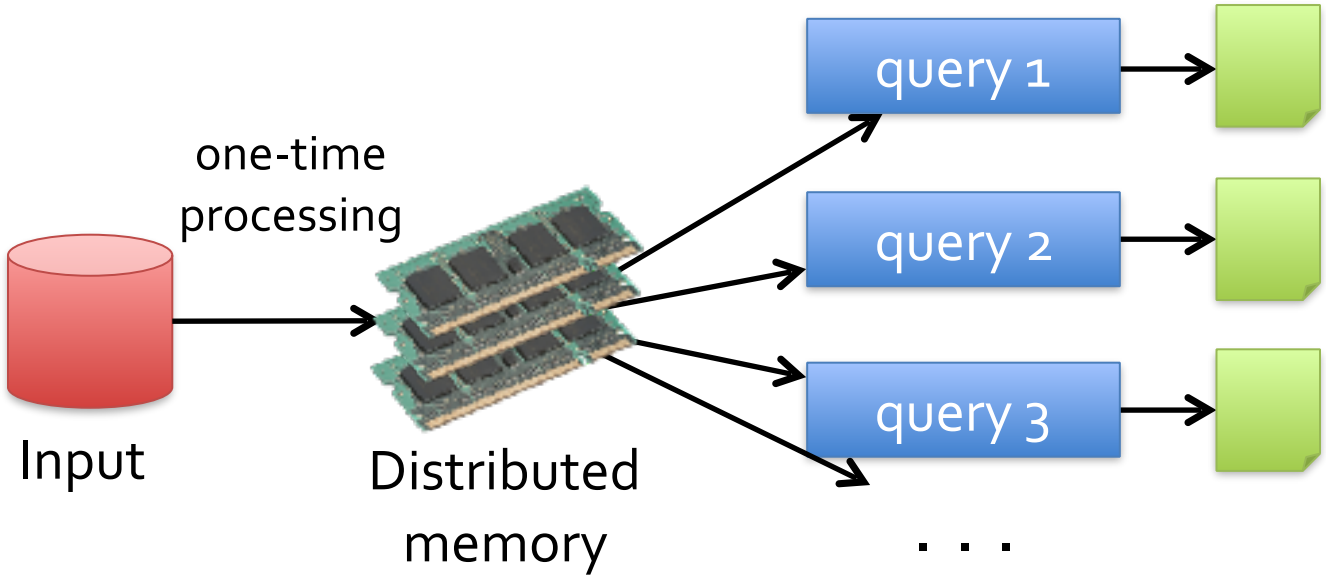

Data Sharing in Spark

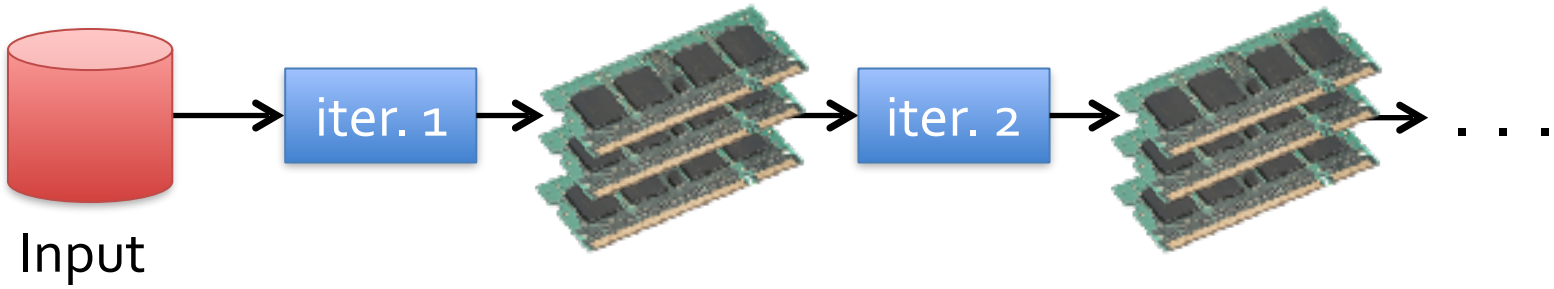

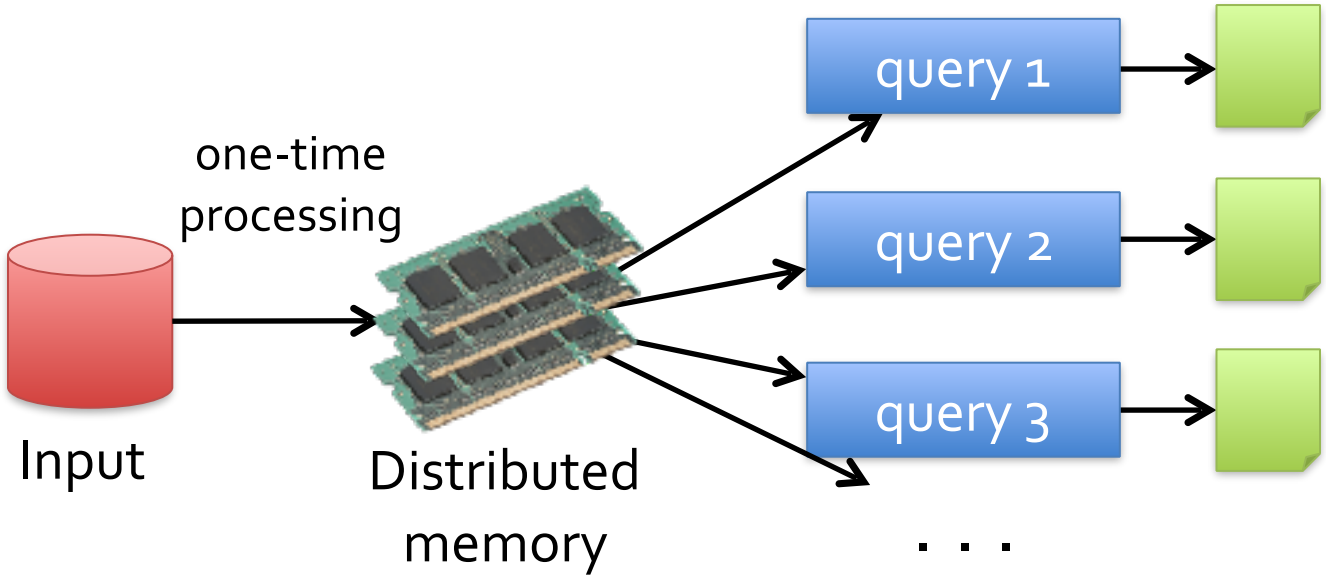

10-100× faster than network and disk

Spark Programming Model

Key idea: *resilient distributed datasets (RDDs)*

- » Distributed collections of objects that can be cached in memory across cluster nodes
- » Manipulated through various parallel operators
- » Automatically rebuilt on failure

Interface

- » Clean language-integrated API in Scala
- » Can be used *interactively* from Scala, Python console
- » Supported languages: Java, **Scala**, Python, R

http://www.scala-lang.org/old/faq/4

Functional programming in D3: http://sleptons.blogspot.com/2015/01/functional-programming-d3js-good-example.html

Scala vs Java 8: http://kukuruku.co/hub/scala/java-8-vs-scala-the-difference-in-approaches-and-mutual-innovations

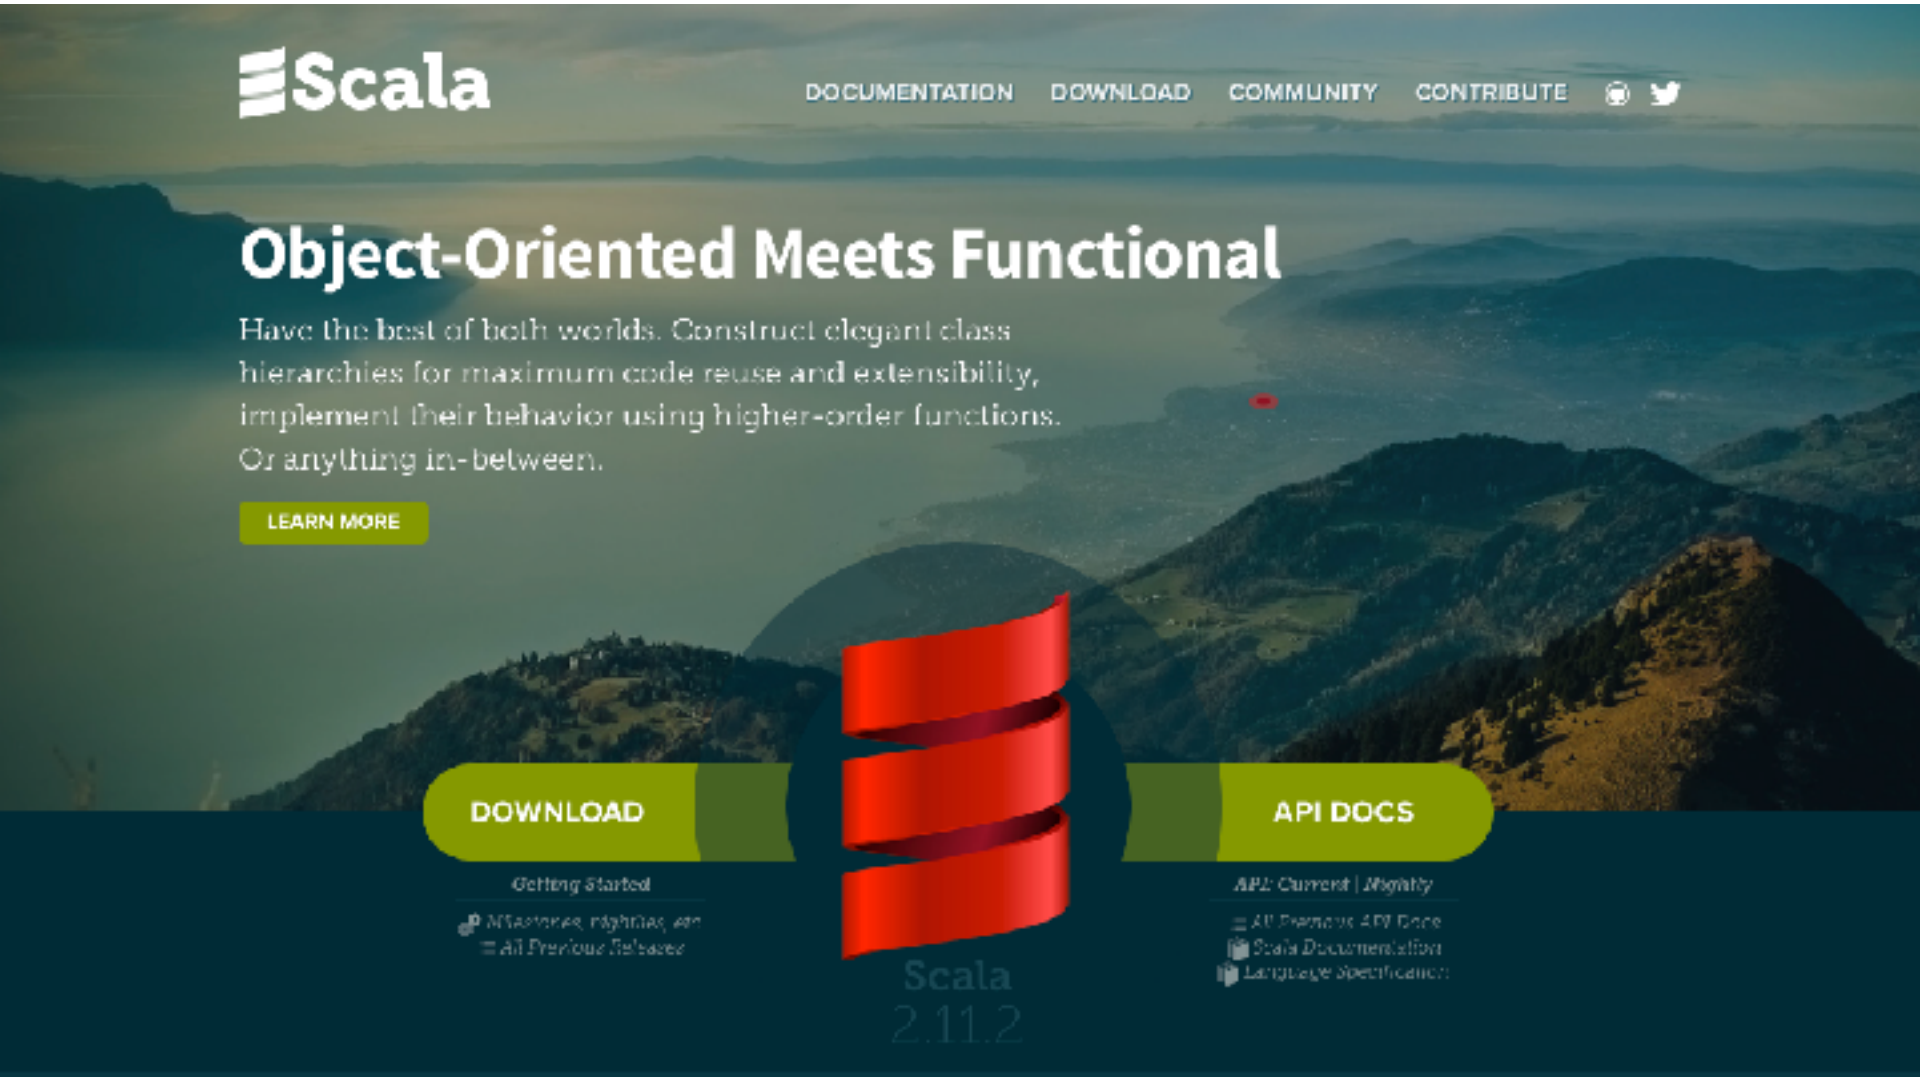

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

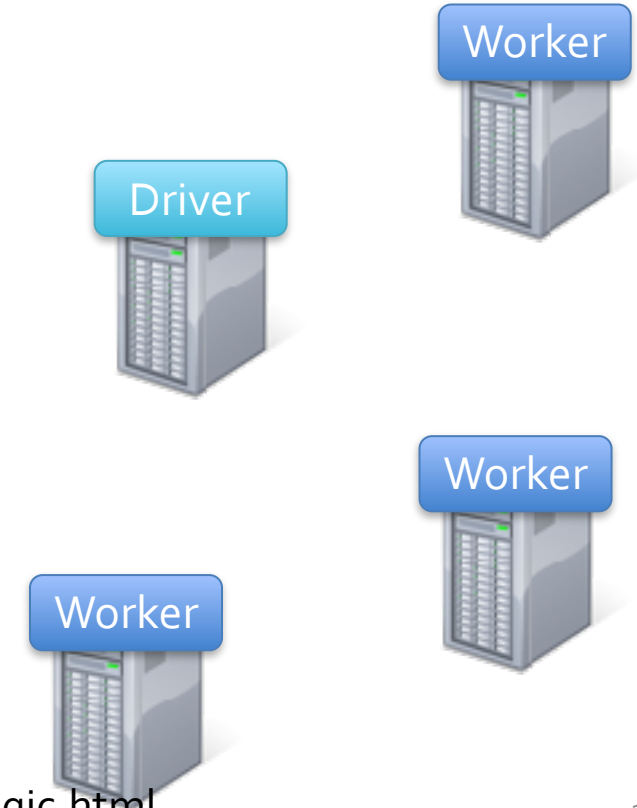

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()
```

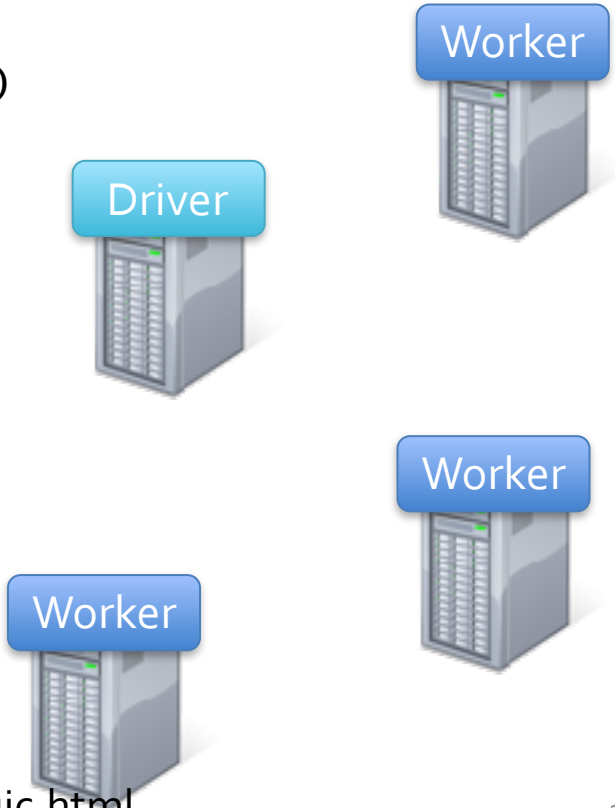

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()
```

Base RDD

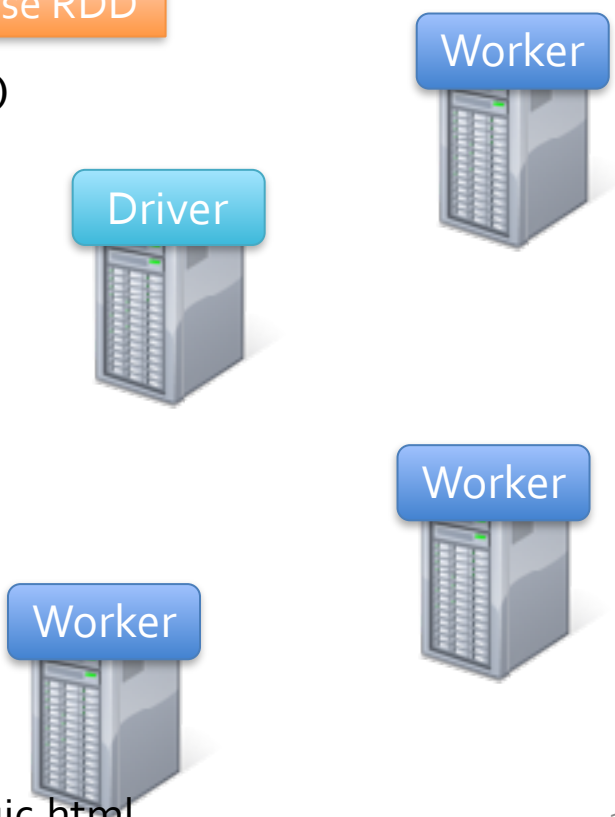

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()
```

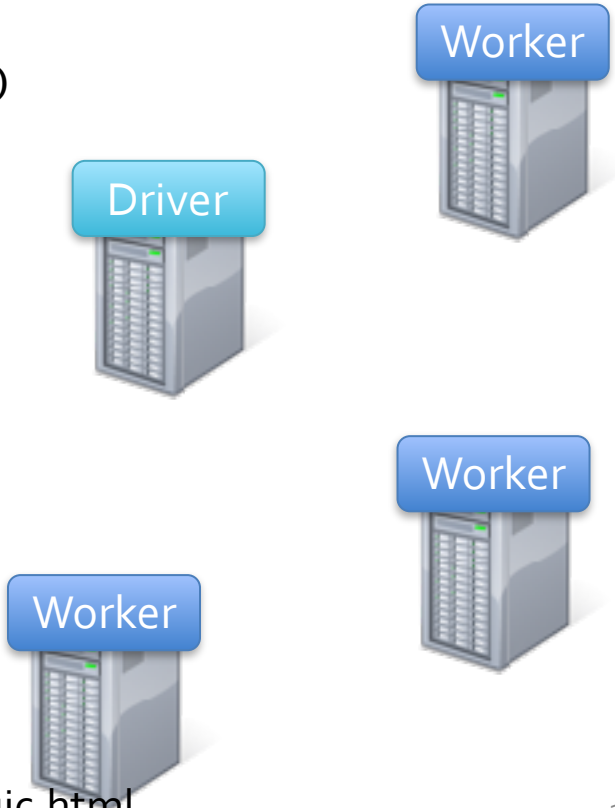

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()
```

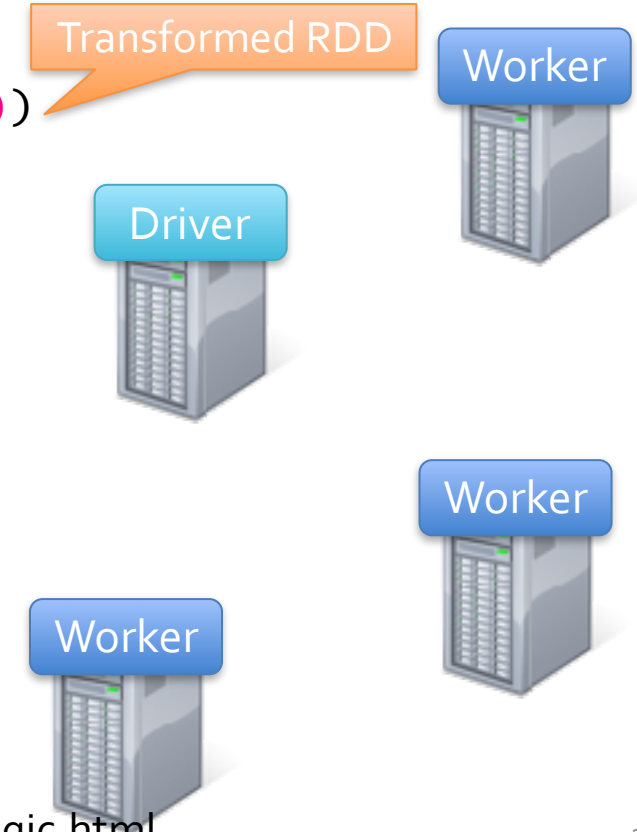

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()
```

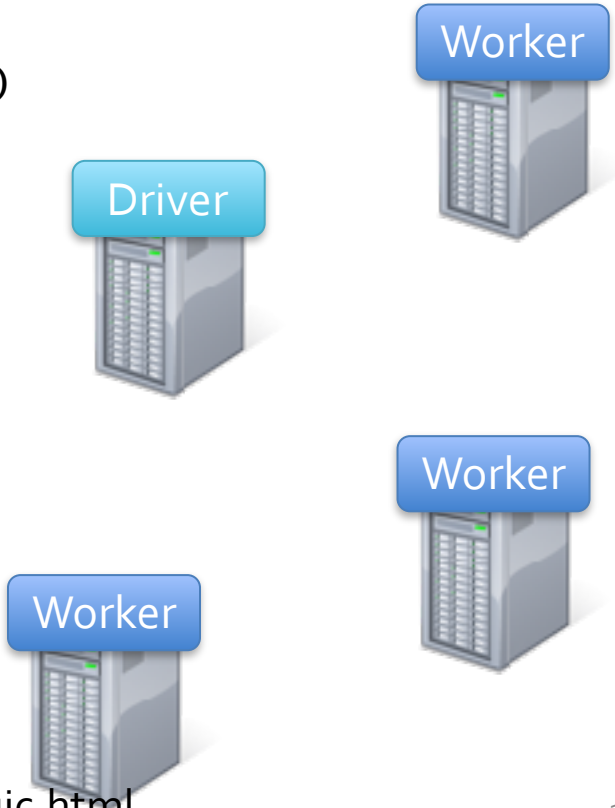

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

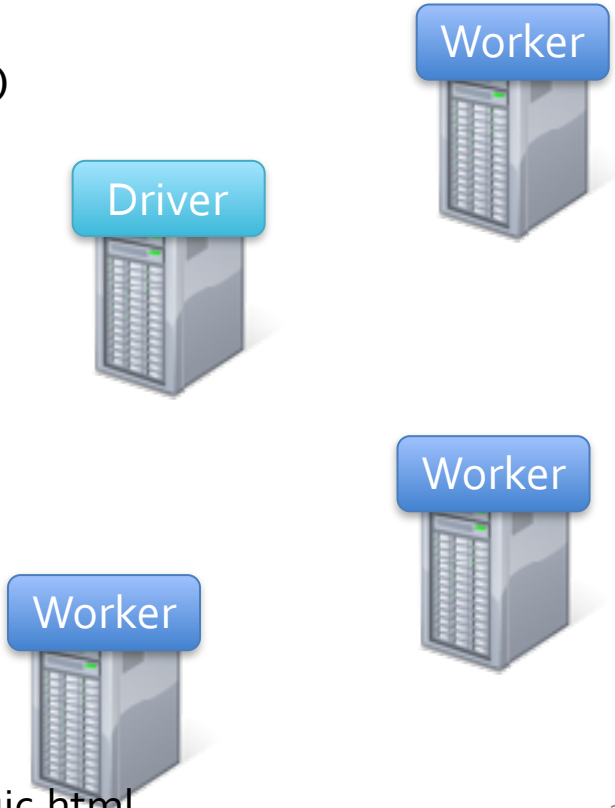

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()

cachedMsgs.filter(_.contains("foo")).count
```

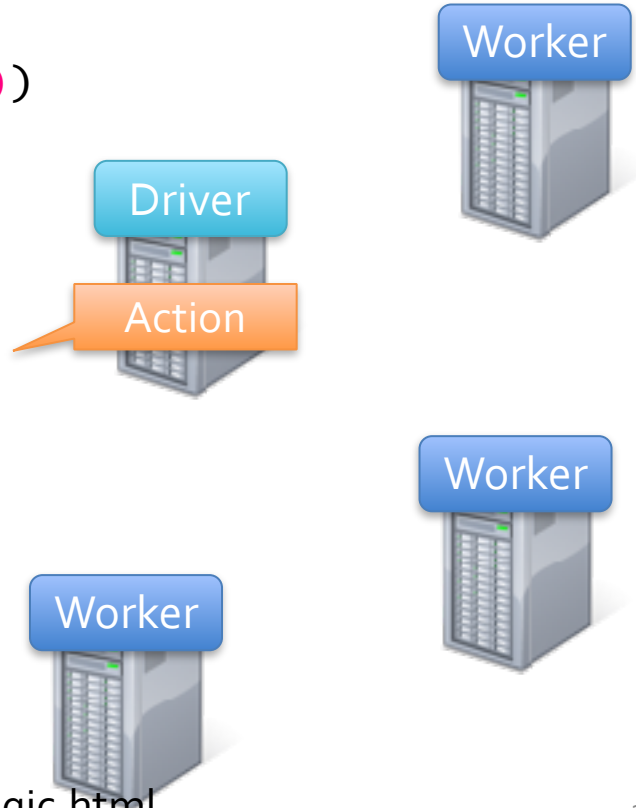

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

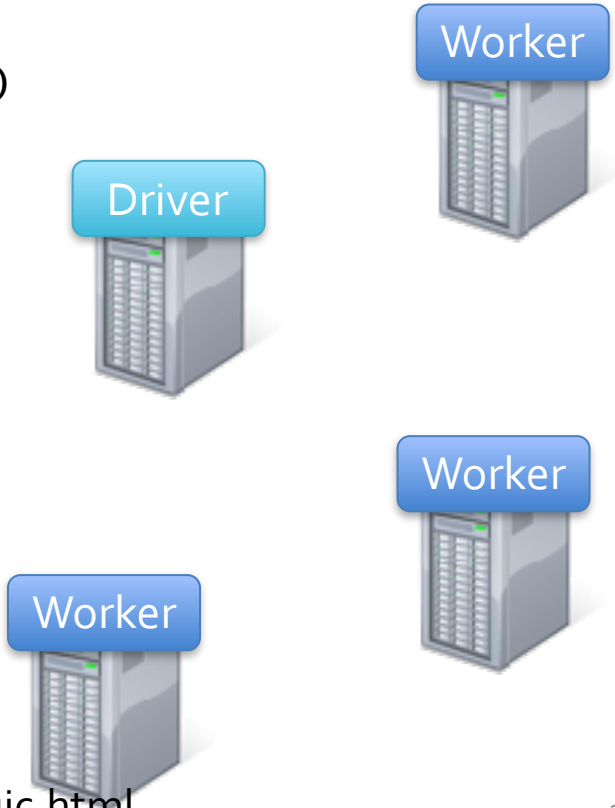

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

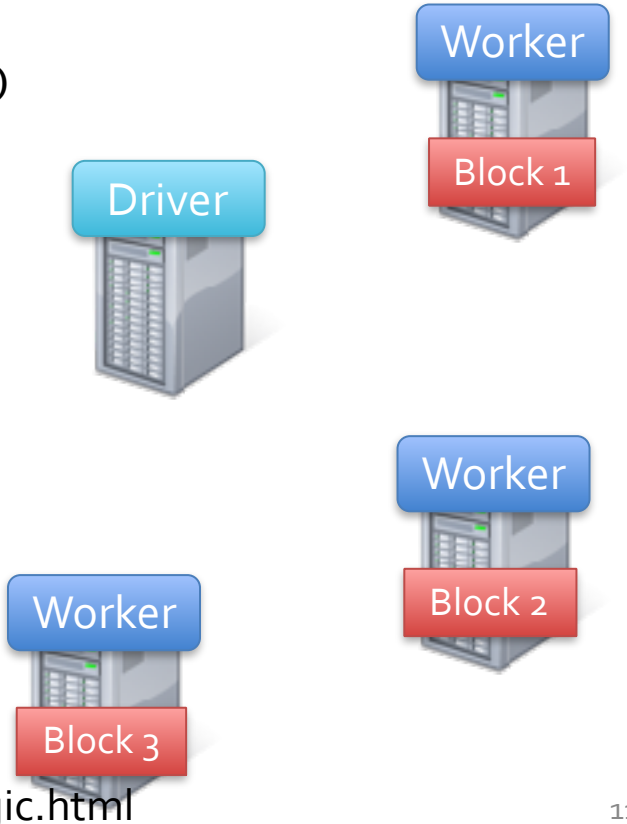

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

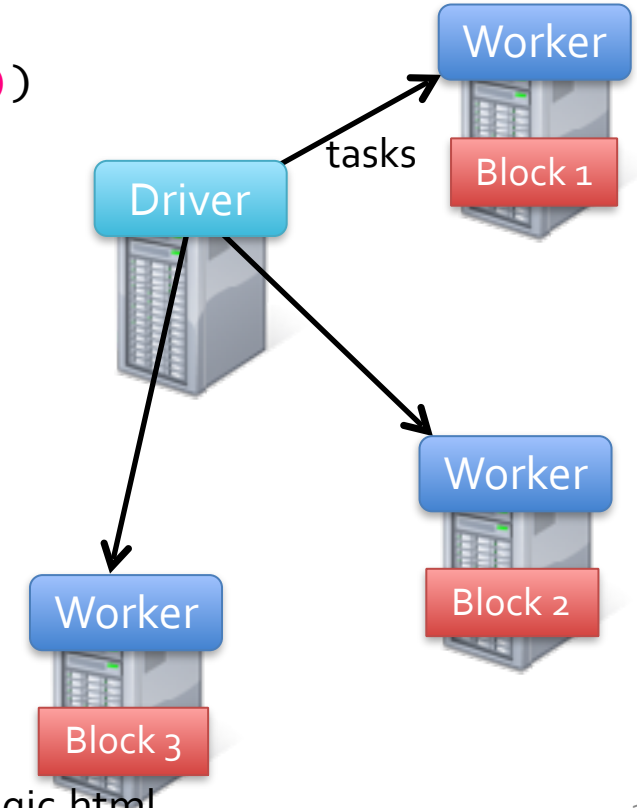

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

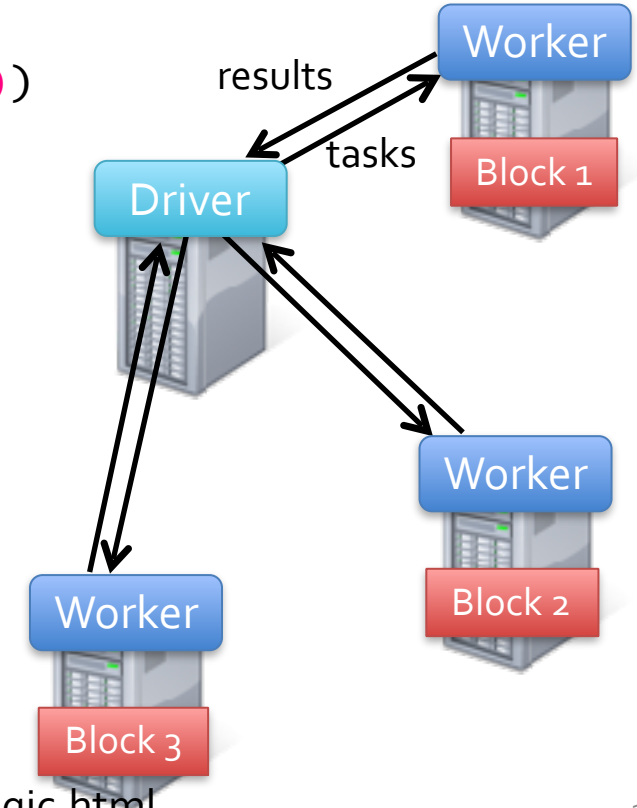

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

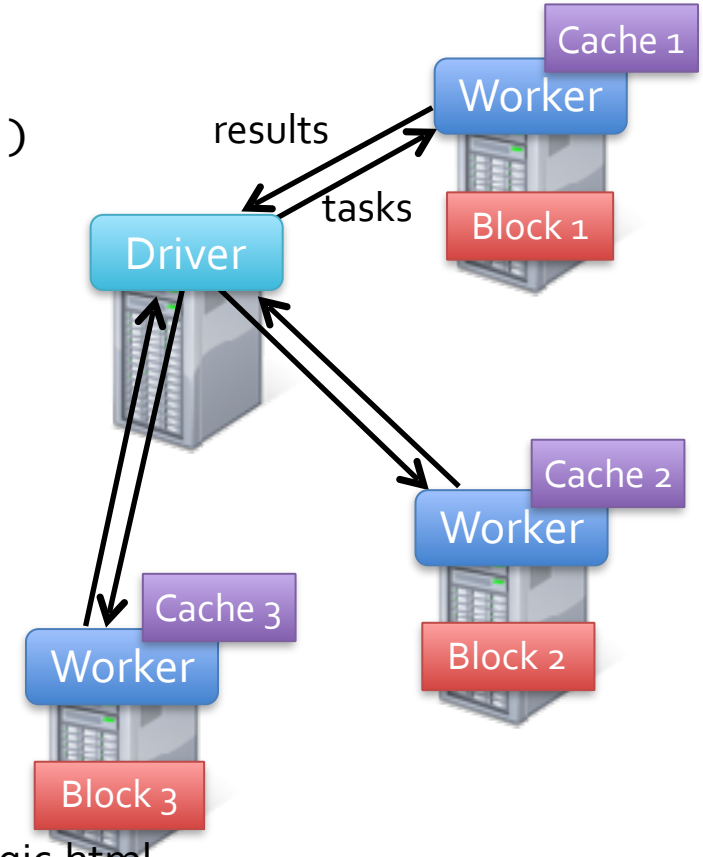

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
```

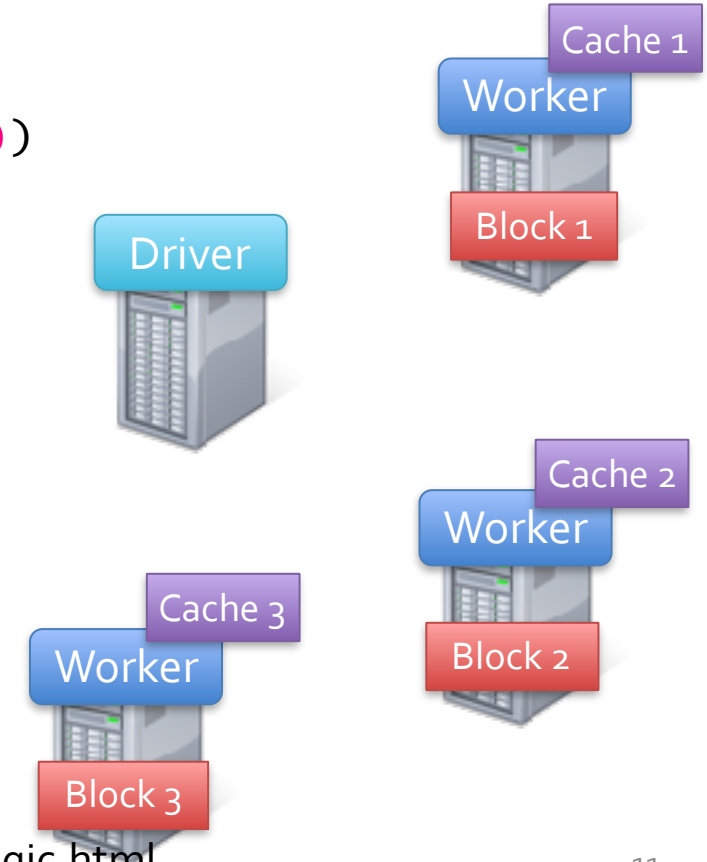

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()

cachedMsgs.filter(_.contains("foo")).count
cachedMsgs.filter(_.contains("bar")).count
```

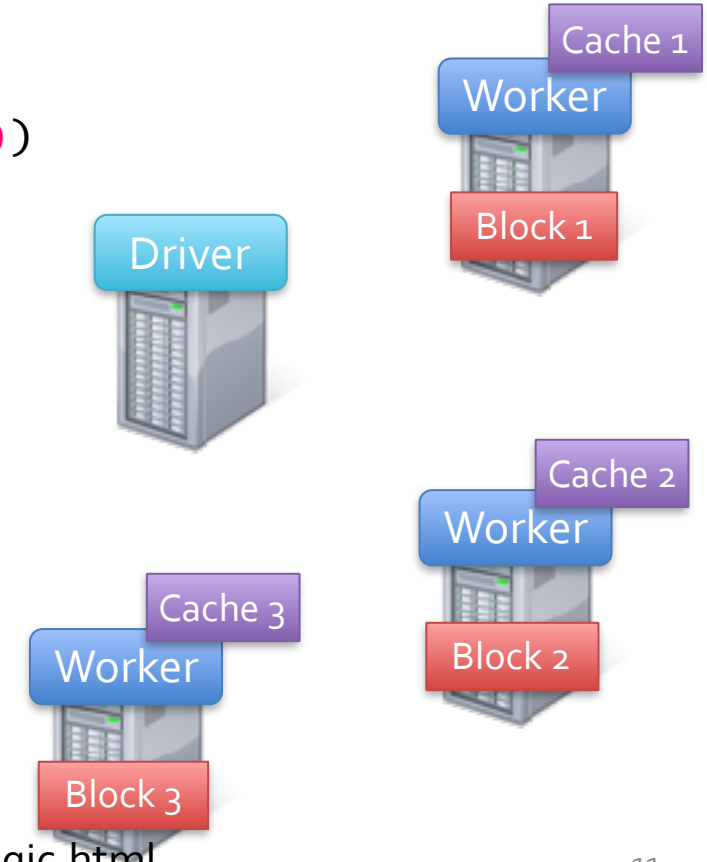

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()


cachedMsgs.filter(_.contains("foo")).count
cachedMsgs.filter(_.contains("bar")).count
. . .
```

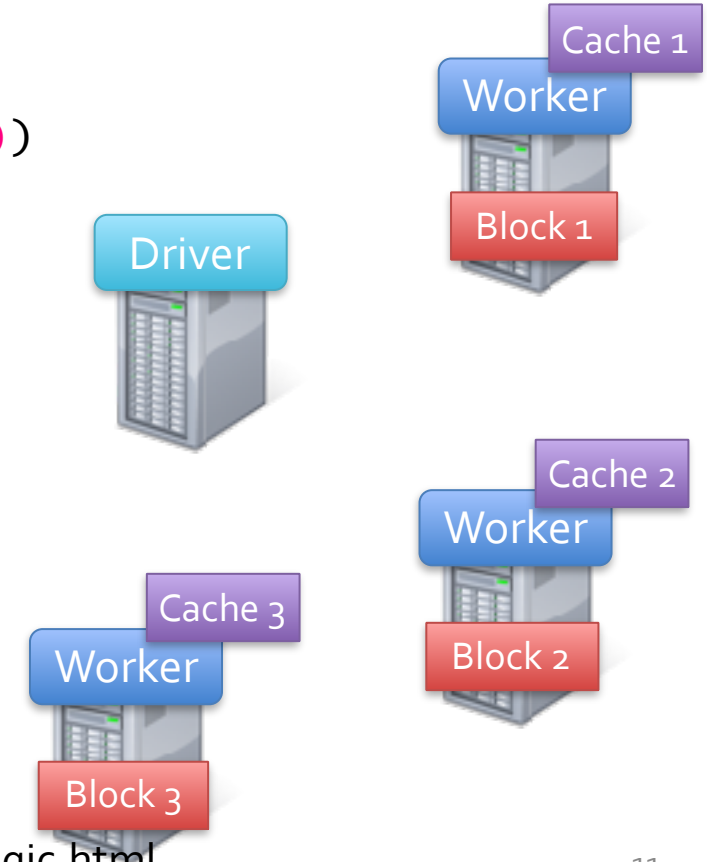

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()

cachedMsgs.filter(_.contains("foo")).count
cachedMsgs.filter(_.contains("bar")).count
. . .
```

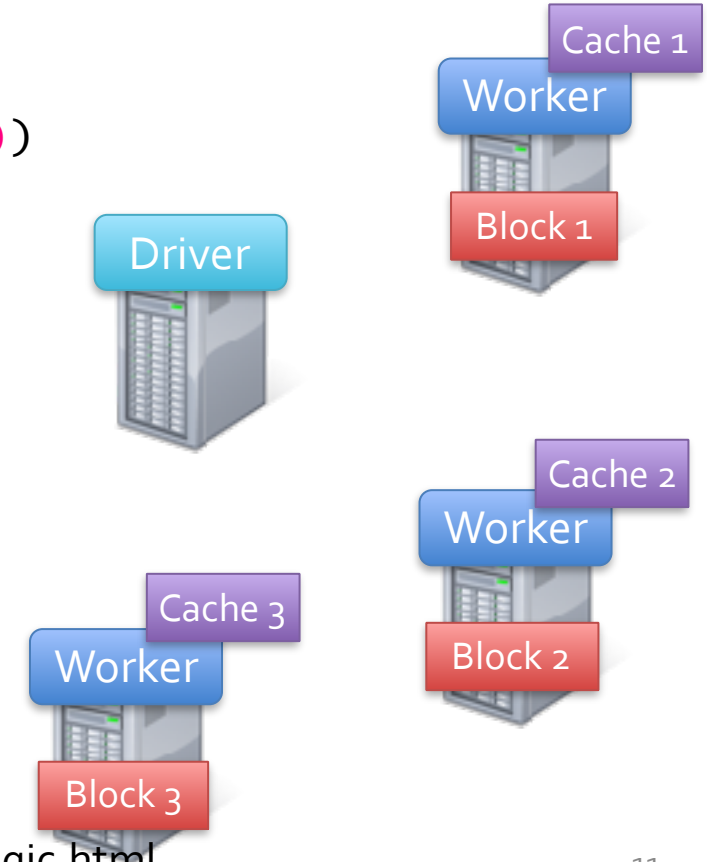

Result: full-text search of Wikipedia in <1 sec (vs 20 sec for on-disk data)

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Example: Log Mining

Load error messages from a log into memory, then interactively search for various patterns

```
lines = spark.textFile("hdfs://...")
errors = lines.filter(_.startsWith("ERROR"))
messages = errors.map(_.split('\t')(2))
cachedMsgs = messages.cache()

cachedMsgs.filter(_.contains("foo")).count
cachedMsgs.filter(_.contains("bar")).count
. . .
```

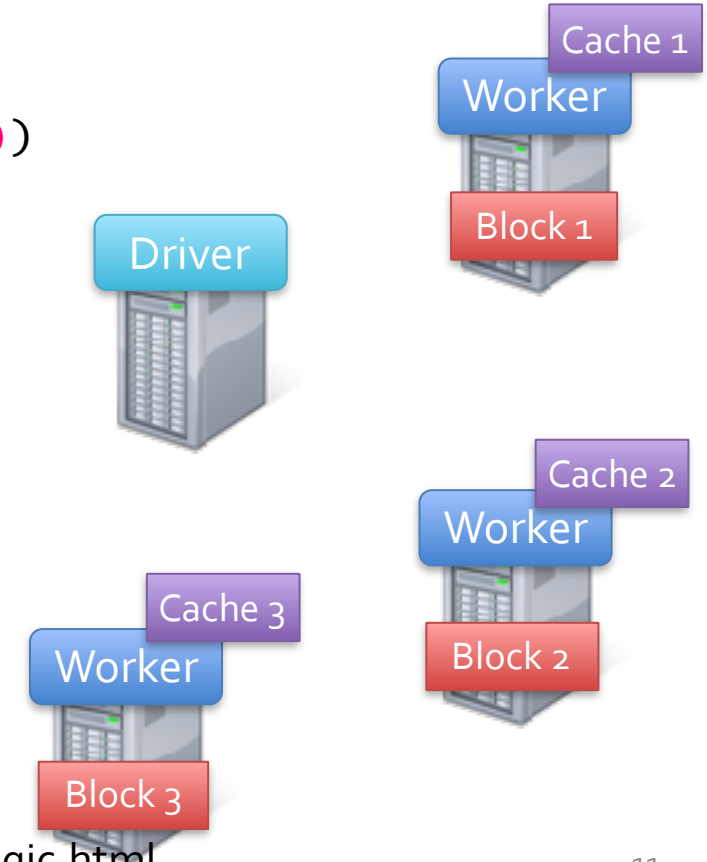

Result: scaled to 1 TB data in 5-7 sec (vs 170 sec for on-disk data)

http://ananthakumaran.in/2010/03/29/scala-underscore-magic.html
http://www.slideshare.net/normation/scala-dreaded

Fault Tolerance

RDDs track the series of transformations used to build them (their *lineage*) to recompute lost data

E.g:
```
messages = textFile(...).filter(_.contains("error"))
                         .map(_.split('\t')(2))
```

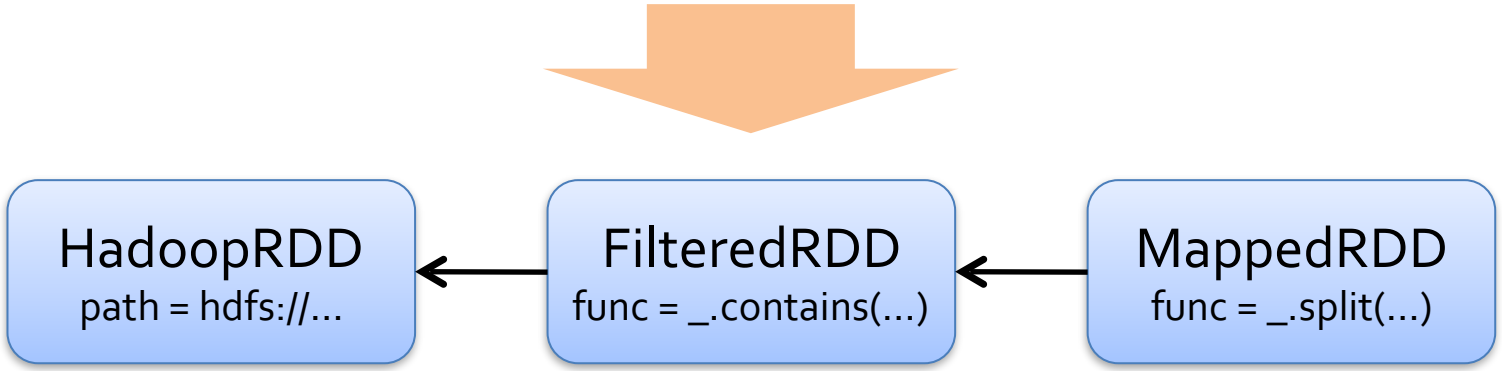

Example: Logistic Regression

```
val data = spark.textFile(...).map(readPoint).cache()

var w = Vector.random(D)

for (i <- 1 to ITERATIONS) {
  val gradient = data.map(p =>
    (1 / (1 + exp(-p.y*(w dot p.x))) - 1) * p.y * p.x
  ).reduce(_ + _)
  w -= gradient
}

println("Final w: " + w)
```

Example: Logistic Regression

```
val data = spark.textFile(...).map(readPoint).cache()

var w = Vector.random(D)

for (i <- 1 to ITERATIONS) {
  val gradient = data.map(p =>
    (1 / (1 + exp(-p.y*(w dot p.x))) - 1) * p.y * p.x
  ).reduce(_ + _)
  w -= gradient
}

println("Final w: " + w)
```

Load data in memory once

Example: Logistic Regression

```
val data = spark.textFile(...).map(readPoint).cache()

var w = Vector.random(D)

for (i <- 1 to ITERATIONS) {
  val gradient = data.map(p =>
    (1 / (1 + exp(-p.y*(w dot p.x))) - 1) * p.y * p.x
  ).reduce(_ + _)
  w -= gradient
}

println("Final w: " + w)
```

Initial parameter vector

Example: Logistic Regression

```
val data = spark.textFile(...).map(readPoint).cache()

var w = Vector.random(D)

for (i <- 1 to ITERATIONS) {
  val gradient = data.map(p =>
    (1 / (1 + exp(-p.y*(w dot p.x))) - 1) * p.y * p.x
  ).reduce(_ + _)
  w -= gradient
}

println("Final w: " + w)
```

Repeated MapReduce steps to do gradient descent

Logistic Regression Performance

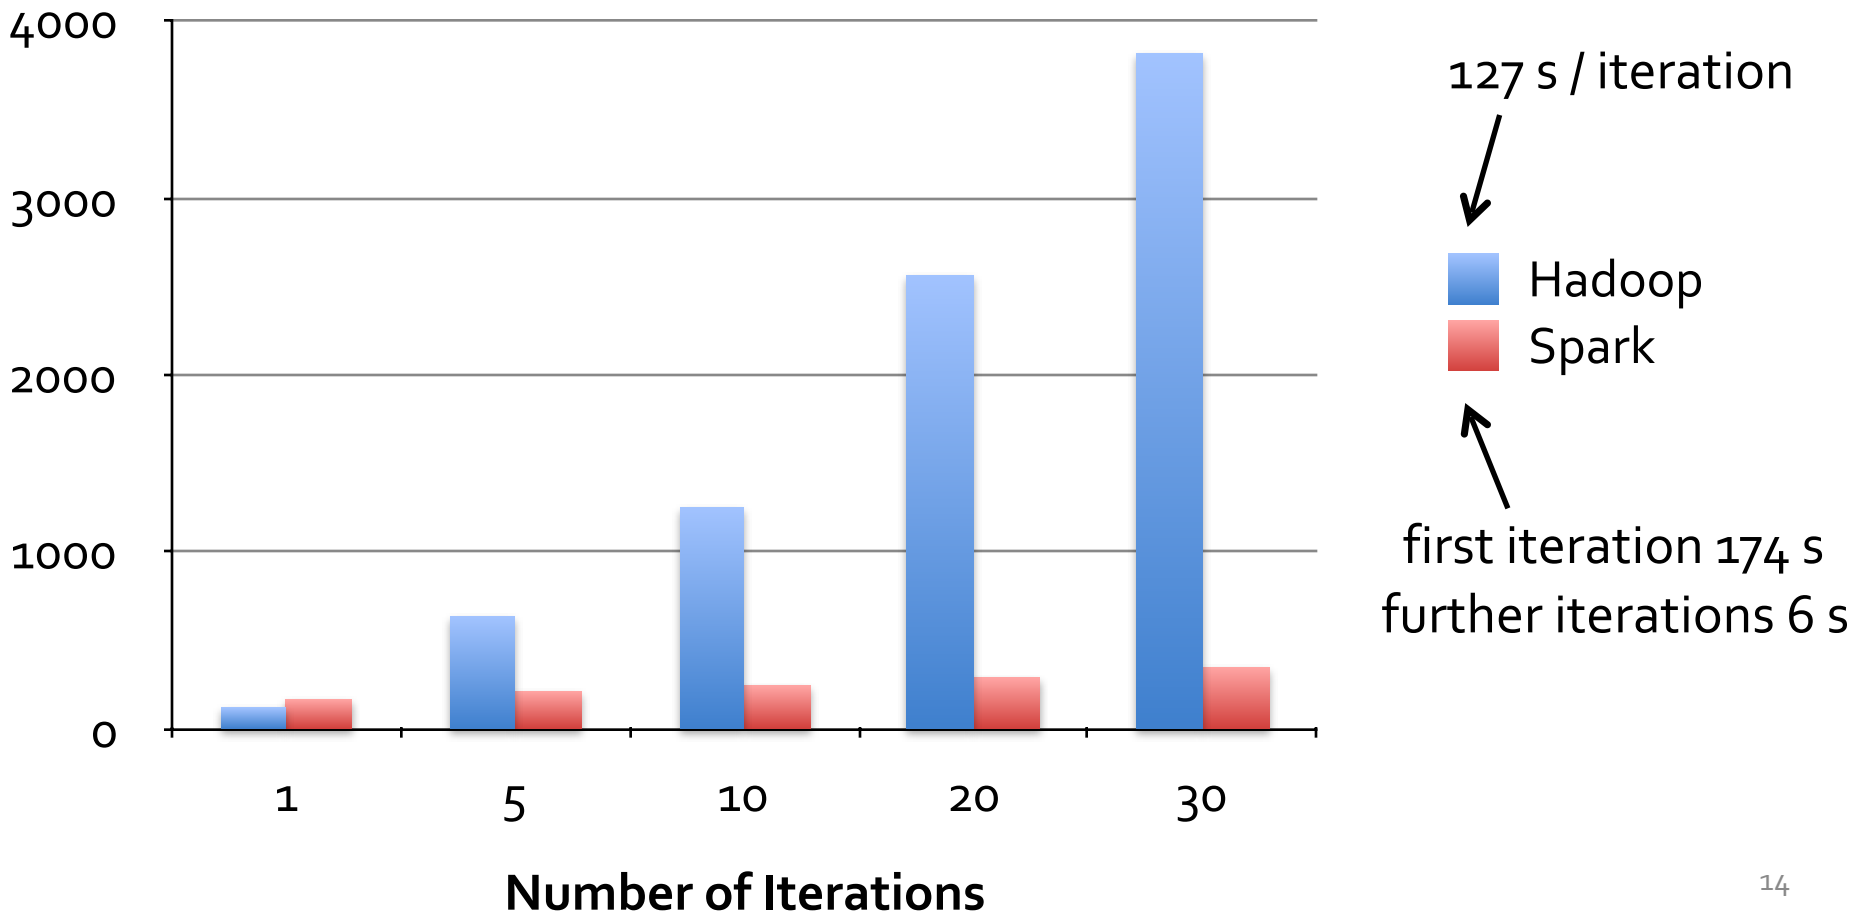

Supported Operators

map	reduce	sample
filter	count	cogroup
groupBy	reduceByKey	take
sort	groupByKey	partitionBy
join	first	pipe
leftOuterJoin	union	save
rightOuterJoin	cross	...

Spark Users

CONVIVA foursquare

quantiFind KLOUT YAHOO! RESEARCH

University of California Berkeley PRINCETON UNIVERSITY UCSF

Spark SQL: Hive on Spark

Motivation

Hive is great, but Hadoop's execution engine makes even the smallest queries take minutes

Scala is good for programmers, but many data users only know SQL

Can we extend Hive to run on Spark?

Hive Architecture

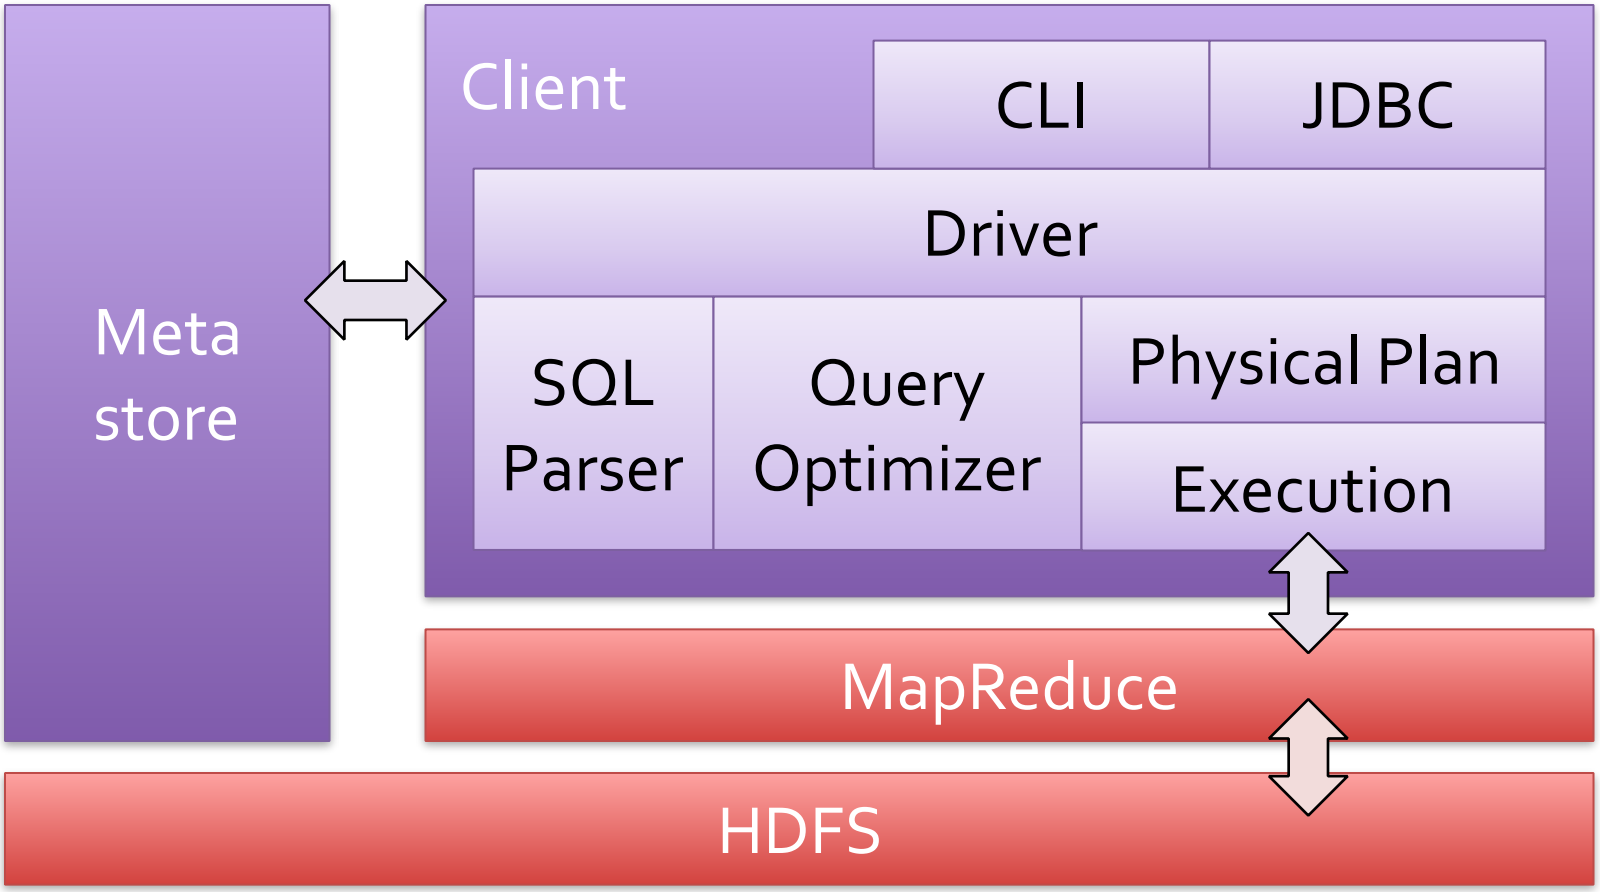

Spark SQL Architecture

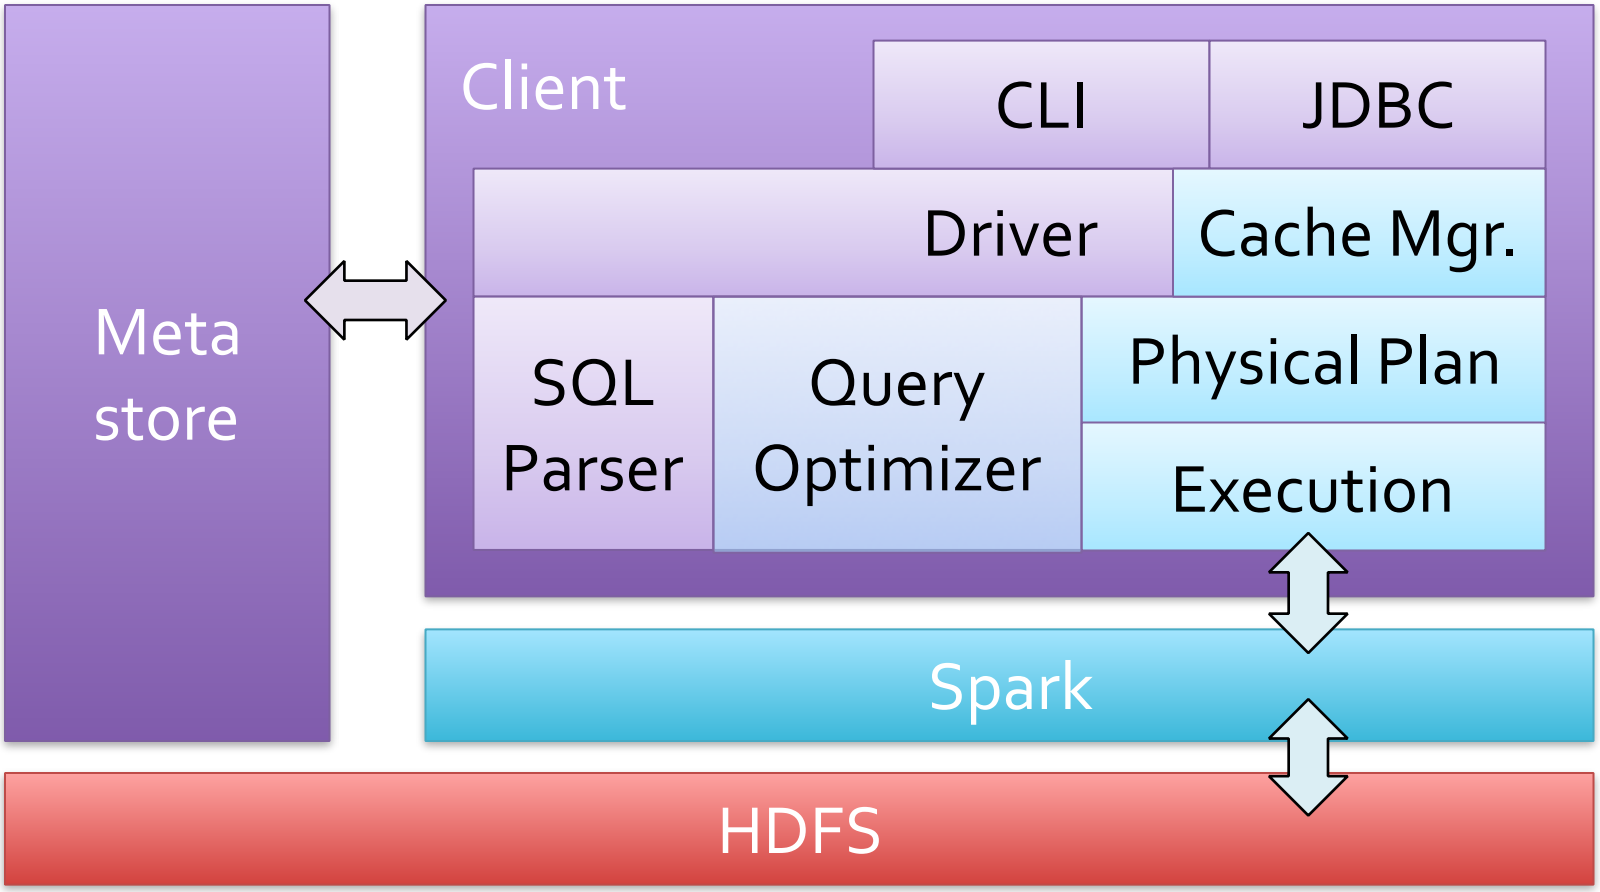

[Engle et al, SIGMOD 2012]

Using Spark SQL

```
CREATE TABLE mydata_cached AS SELECT …
```

Run standard HiveQL on it, including UDFs

» A few esoteric features are not yet supported

Can also call from Scala to mix with Spark

Benchmark Query 1

```
SELECT * FROM grep WHERE field LIKE '%XYZ%';
```

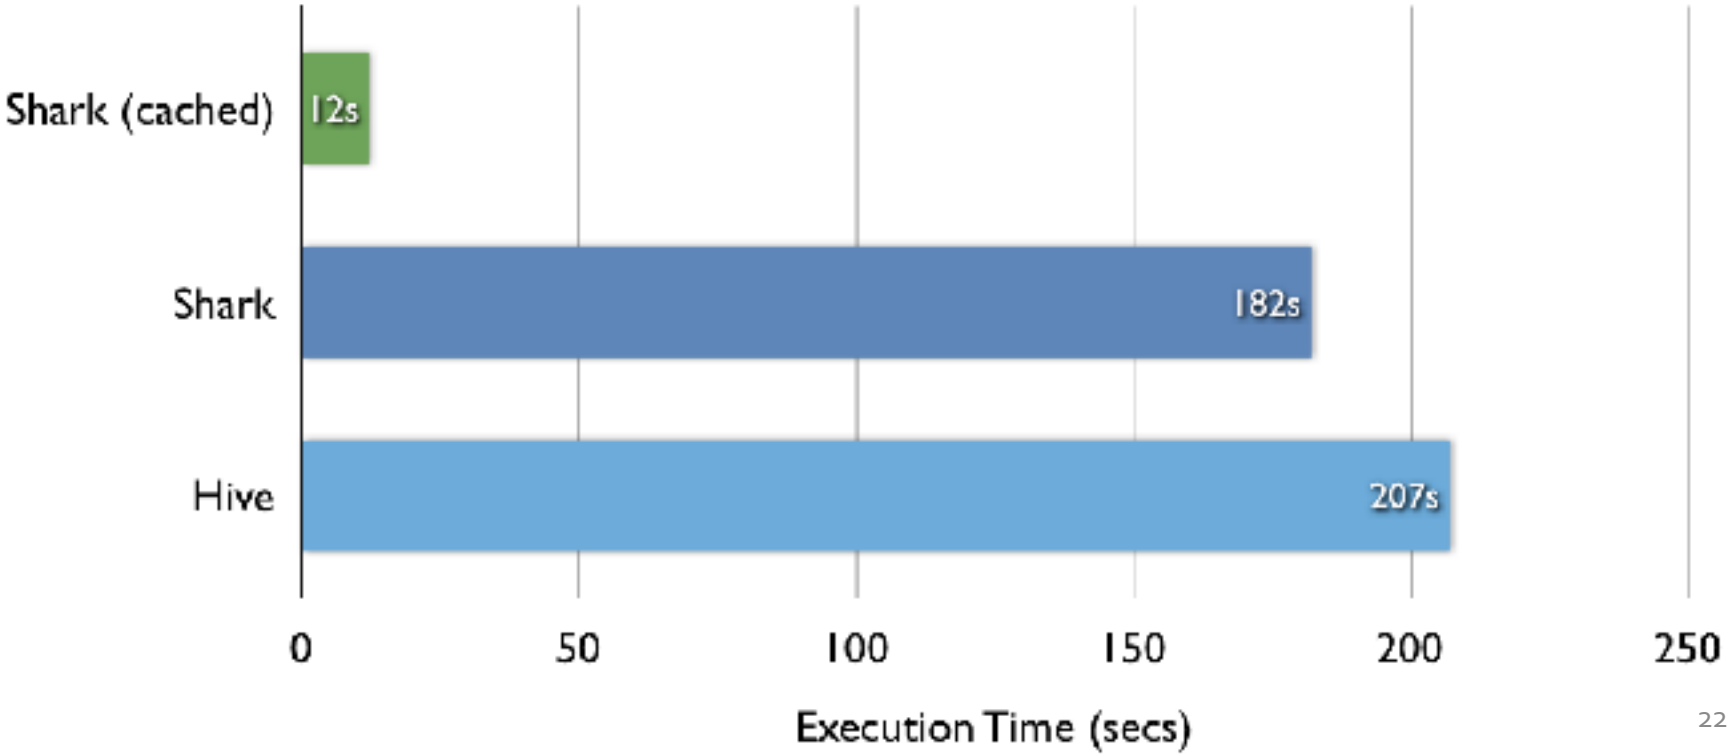

Benchmark Query 2

```
SELECT sourceIP, AVG(pageRank), SUM(adRevenue) AS earnings
FROM rankings AS R, userVisits AS V ON R.pageURL = V.destURL
WHERE V.visitDate BETWEEN ‘1999-01-01’ AND ‘2000-01-01’
GROUP BY V.sourceIP
ORDER BY earnings DESC
LIMIT 1;
```

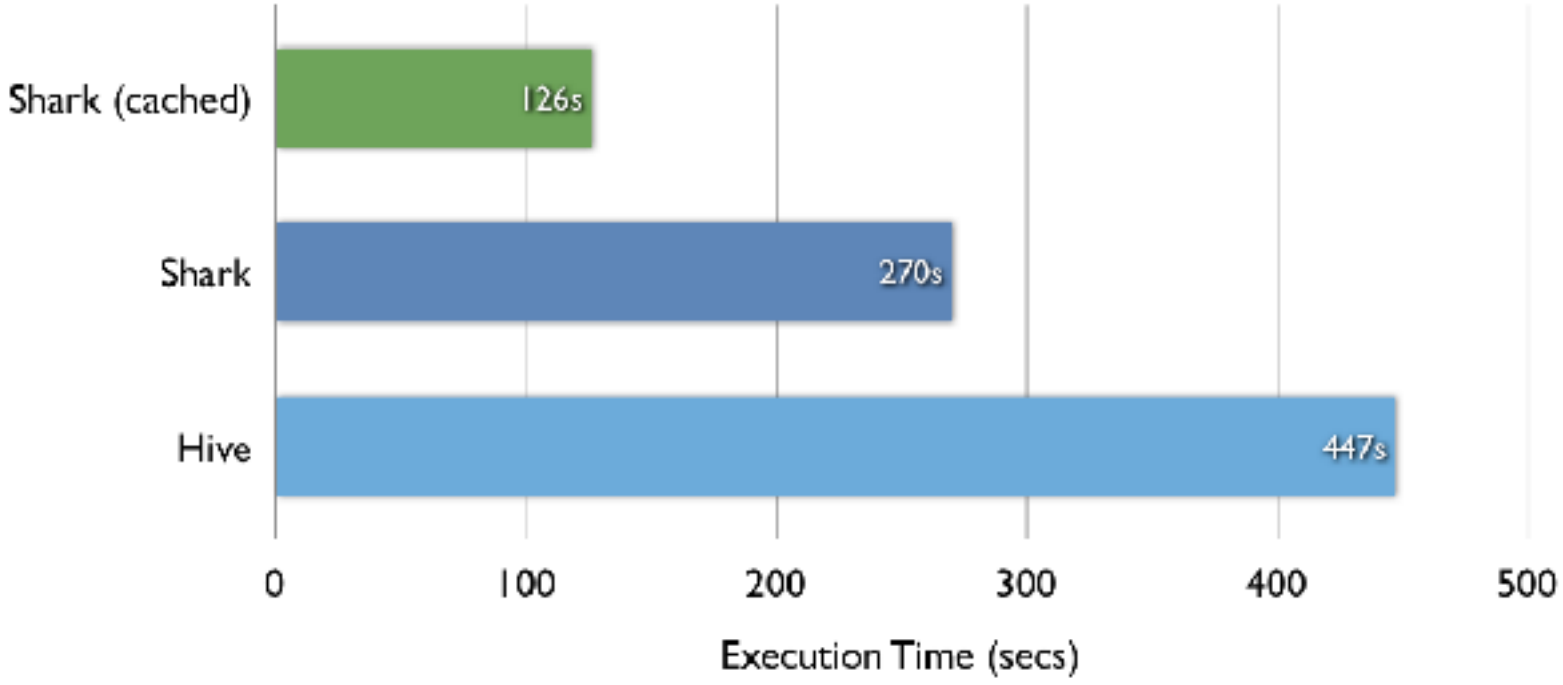

Behavior with Not Enough RAM

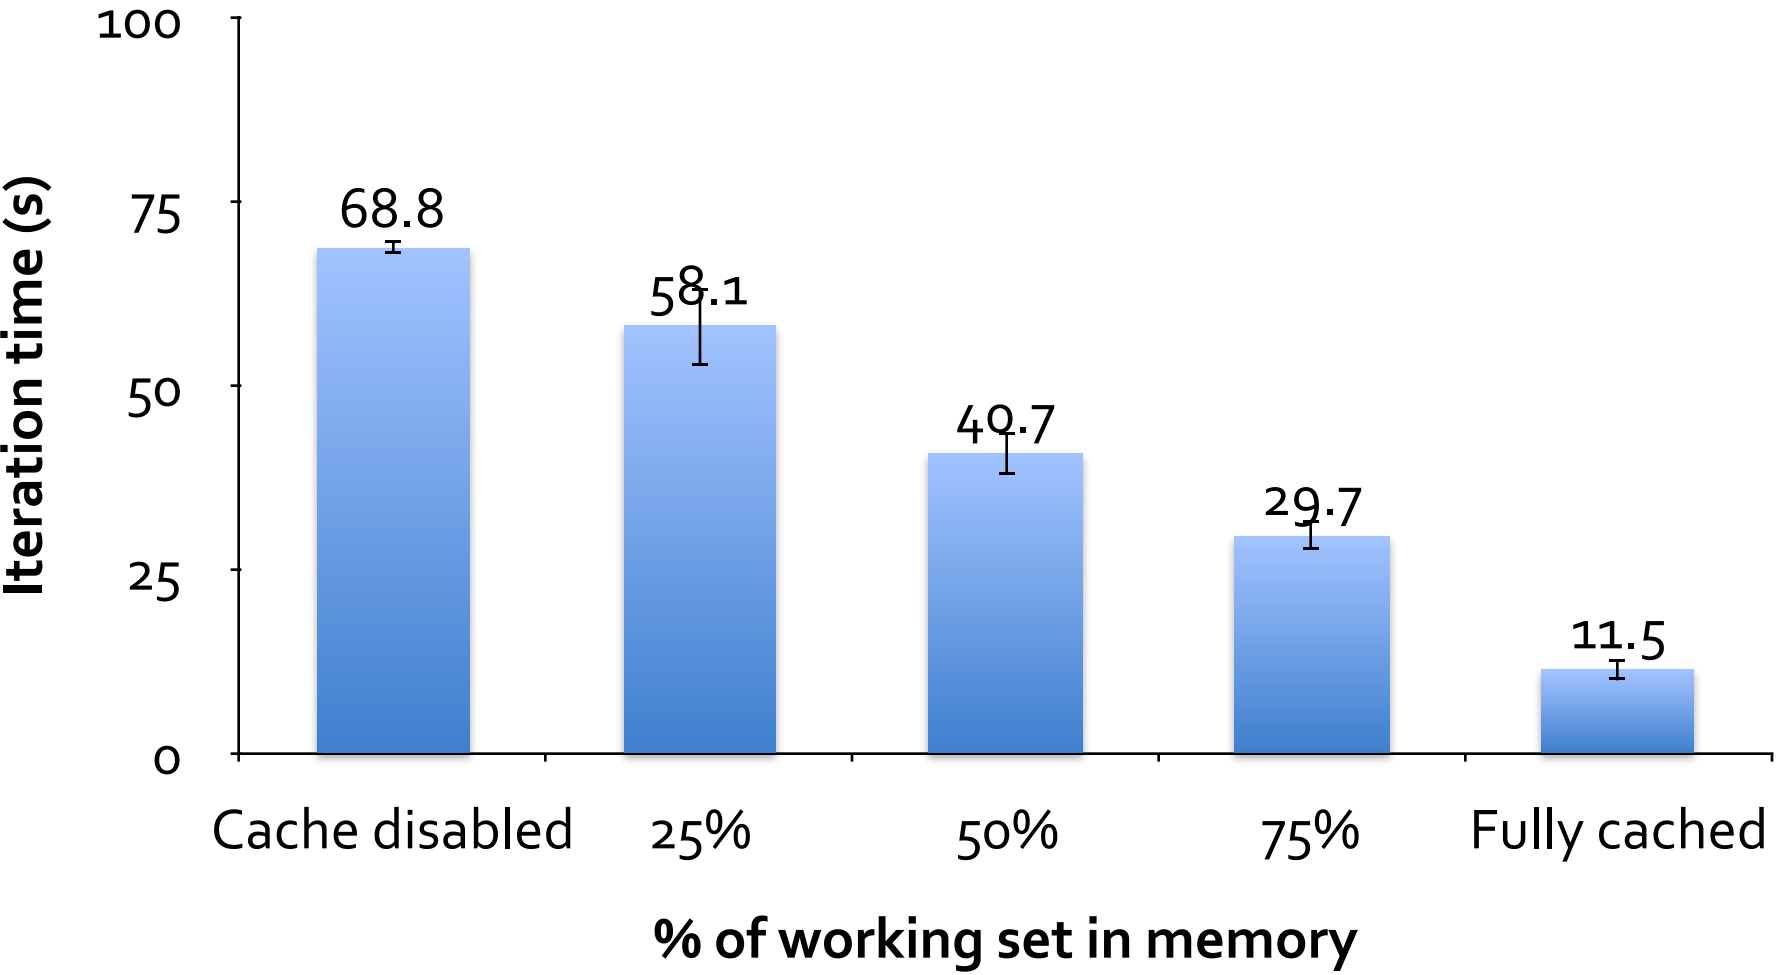

What's Next?

Recall that Spark's model was motivated by two emerging uses (interactive and multi-stage apps)

Another emerging use case that needs fast data sharing is **stream processing**

» Track and update state in memory as events arrive

» Large-scale reporting, click analysis, spam filtering, etc

Streaming Spark

Extends Spark to perform streaming computations

Runs as a series of small (~1 s) batch jobs, keeping state in memory as fault-tolerant RDDs

Intermix seamlessly with batch and ad-hoc queries

```
tweetStream
  .flatMap(_.toLower.split)
  .map(word => (word, 1))
  .reduceByWindow("5s", _ + _)
```

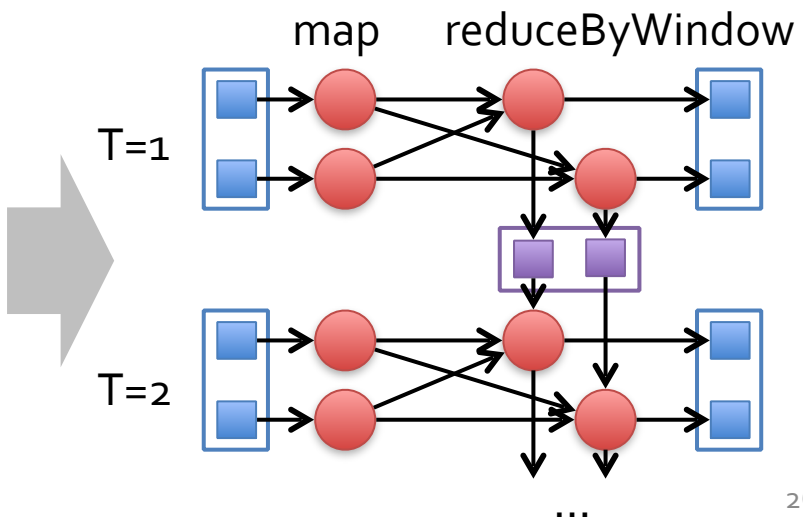

[Zaharia et al, HotCloud 2012]

map() vs flatMap()

The best explanation:

https://www.linkedin.com/pulse/difference-between-map-flatmap-transformations-spark-pyspark-pandey

flatMap = map + flatten

Streaming Spark

Extends Spark to perform streaming computations

Runs as a series of small (~1 s) batch jobs, keeping state in memory as fault-tolerant RDDs

Intermix seamlessly with batch and ad-hoc queries

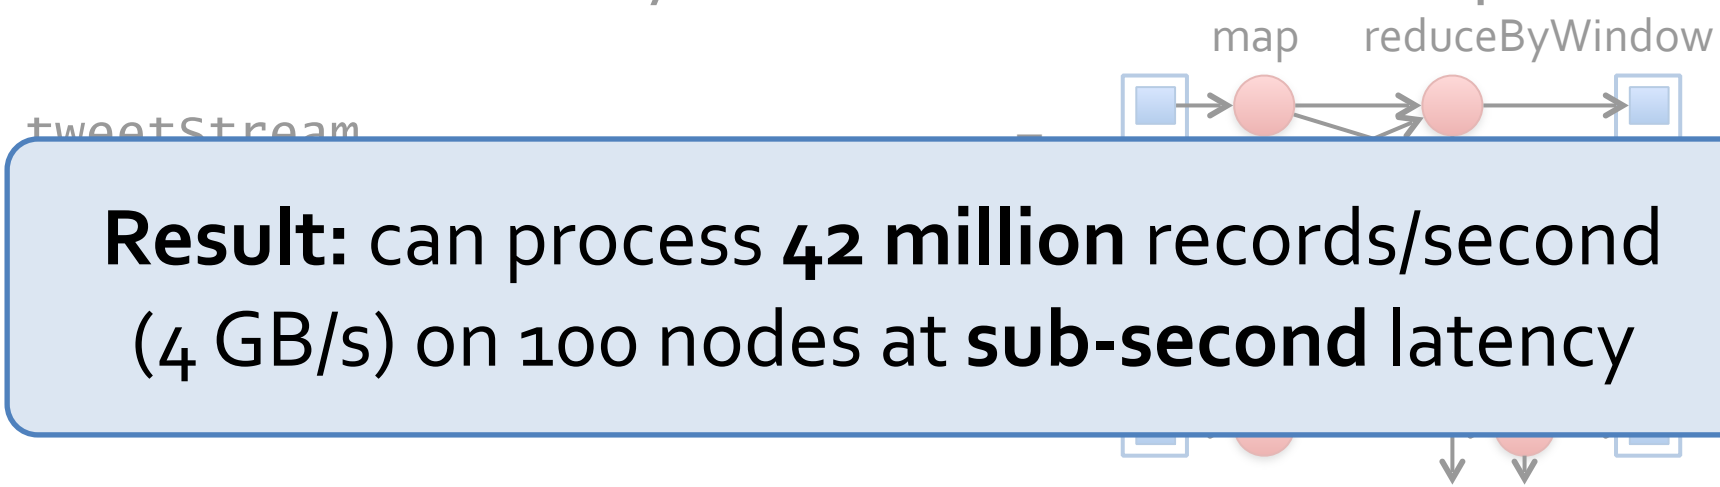

Result: can process **42 million** records/second (4 GB/s) on 100 nodes at **sub-second** latency

[Zaharia et al, HotCloud 2012]

Spark Streaming

Create and operate on RDDs from live data streams at set intervals

Data is divided into batches for processing

Streams may be combined as a part of processing or analyzed with higher level transforms

SPARK PLATFORM

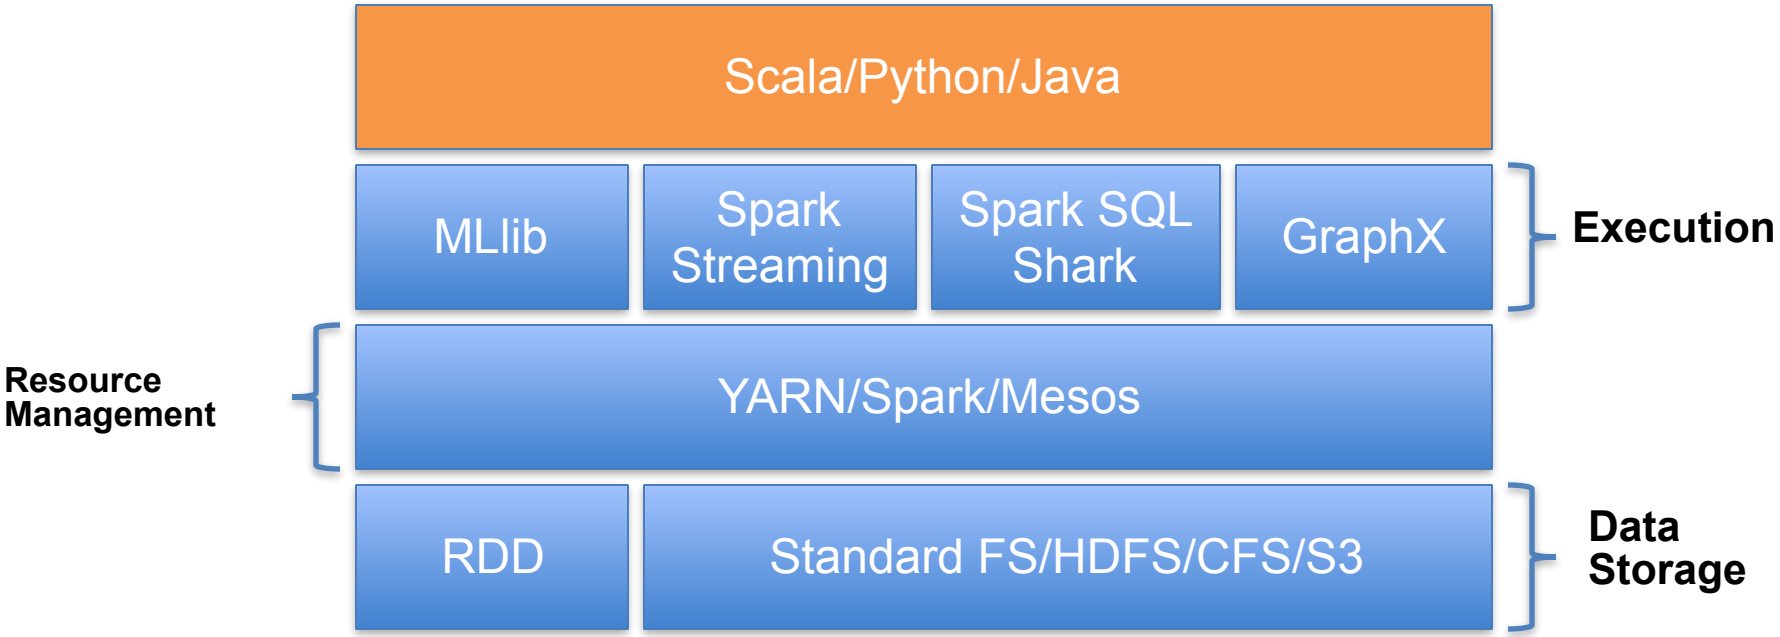

GraphX

Parallel graph processing

Extends RDD -> Resilient Distributed Property Graph

» Directed multigraph with properties attached to each vertex and edge

Limited algorithms

» PageRank

» Connected Components

» Triangle Counts

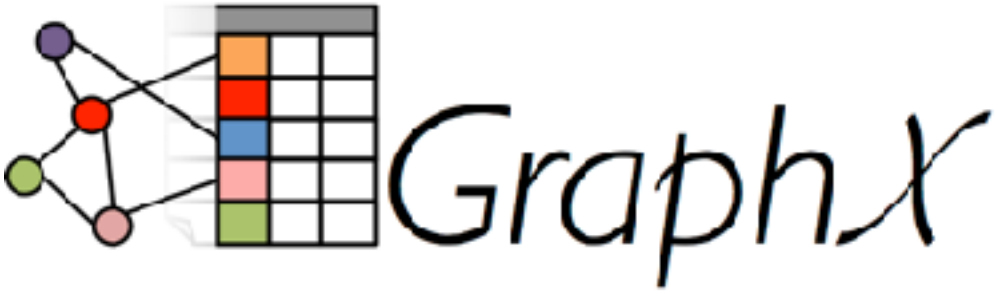

Alpha component

MLlib

Scalable machine learning library

Interoperates with NumPy

Available algorithms in **1.0**

- » Linear Support Vector Machine (SVM)
- » Logistic Regression
- » Linear Least Squares
- » Decision Trees
- » Naïve Bayes
- » Collaborative Filtering with ALS
- » K-means
- » Singular Value Decomposition
- » Principal Component Analysis
- » Gradient Descent

MLlib 2.0 (part of Spark 2.0)

- Basic statistics
  - summary statistics
  - correlations
  - stratified sampling
  - hypothesis testing
  - streaming significance testing
  - random data generation
- Classification and regression
  - linear models (SVMs, logistic regression, linear regression)
  - naive Bayes
  - decision trees
  - ensembles of trees (Random Forests and Gradient-Boosted Trees)
  - isotonic regression
- Collaborative filtering
  - alternating least squares (ALS)
- Clustering
  - k-means
  - Gaussian mixture
  - power iteration clustering (PIC)
  - latent Dirichlet allocation (LDA)
  - bisecting k-means
  - streaming k-means
- Dimensionality reduction
  - singular value decomposition (SVD)
  - principal component analysis (PCA)
- Feature extraction and transformation
- Frequent pattern mining
  - FP-growth
  - association rules
  - PrefixSpan
- Evaluation metrics
- PMML model export
- Optimization (developer)
  - stochastic gradient descent
  - limited-memory BFGS (L-BFGS)

https://spark.apache.org/docs/latest/mllib-guide.html

Spark 2

(very new still)

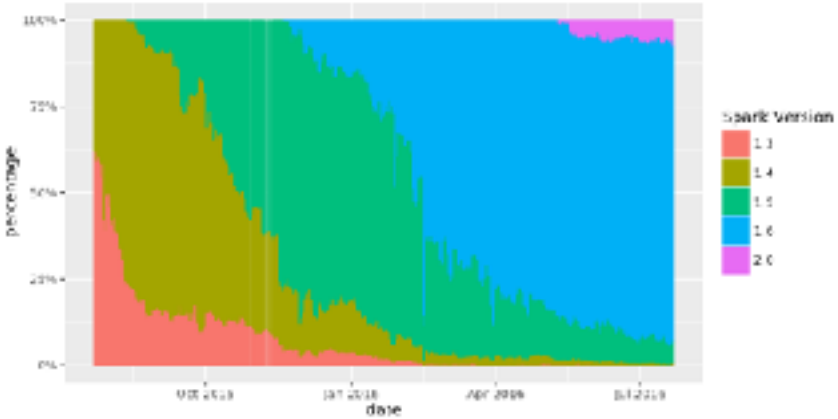

New feature highlights

https://databricks.com/blog/2016/07/26/introducing-apache-spark-2-0.html

Spark 2.0.0 **has API breaking changes**

Partly why HW3 uses Spark 1.6 (also, Cloudera distribution's Spark 2 support is in beta)

More details: https://spark.apache.org/releases/spark-release-2-0-0.html

Commercial Support

Databricks

» Not to be confused with DataStax

» Found by members of the AMPLab

» Offering

- Certification
- Training
- Support
- DataBricks Cloud